


# Performance Touch Screen POS System HK950



## ■ High Performance CPU

High Performance POS, perfect for heavy loads application environments

## ■ Elegant Space Saving Design

Compact footprint overcomes the severe space constraints of retail establishments

## ■ Eco Friendly

Embedded with powerful yet energy-efficient Intel Core i3, i5 CPU

## ■ Easy Maintenance

Easy to maintain key components

# HK950 Touch Screen POS System

HK950 Touch-Screen POS System features the Intel Core i3, i5 CPU which delivers high performance yet power saving with 3 mounting options to meet the needs of most retail, hospitality & entertainment environments. The HK950 Touch-Screen POS System is a cost-effective solution which features design that allows easy HDD removal and replacement making it easy to maintain the system.

## Key Features


### ■ Intel® Core® Processor

HK950 Touch-Screen POS System is designed to deliver quiet operations, thus reducing distractions, costs and failures. Equipped with High-performing Intel® Core® Processor, it allows for faster operations, reliability and stable quality



### ■ Easy Maintenance Design

The HK950 Touch – Screen POS System features a unique and convenient way of removing and replacing the HDD for easy maintenance and upgrade. Users can simply remove the HDD tray holder and remove the HDD after unscrewing the holder.

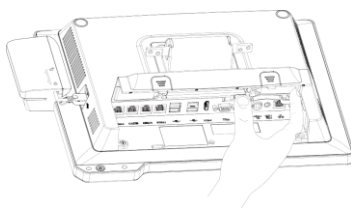

### ■ 15" TFT LCD Capacitive Touch

The HK950 Touch – Screen POS System features a 15" Flat Capacitive Touch – Screen for Operator Display which provides a smooth and seamless surface. It is resistant to water, dust, grease and food build-up and fulfills the needs of market.



### ■ Flexible Configuration


The HK950 Touch – Screen POS System comes with various modular options like 15" Customer Displays, 2 x 20 Alphanumeric VFD and MSR; thus providing the users with flexibility to choose the options that suit the market trends.



## HK950 Specifications

Features	Specifications
Processor	Intel® Core® Gen-6 Processor i3-6100U & i5-6200U
Main Memory	Minimum 4 GB up to a maximum of 16GB (SO-DIMM 1 x 204 pin DDR4 Non ECC)
HDD / SSD	1 x 2.5" SATA3 SSD Bay (64GB or more)
OS	Win7/Pos Ready7/Windows 10 Enterprise/Linux
Network	1 x RJ-45 Gigabit Ethernet (10/100/1000)
Serial Port	4 x RJ-50 Serial Port
USB Ports	6 x External USB (4 x USB 2.0, 2 x USB 3.0)
Output	1 x VGA port (D-Sub 15)
Audio	1 x Line-out
Cash Drawer	RJ – 11
Operator Display	15" TFT LCD Capacitive Touch / 1024 x 768
Customer Display	15" TFT LCD (Touch/Non-Touch) or 20 x 2 VFD
Weight	Stand Base Type: Approx. 10 Kg
Dimensions	Stand Base Type: 360 (W) x 290 (D) x 410 (H) mm
Power Supply	90W 24 V DC Power Adapter

## Connector Panel

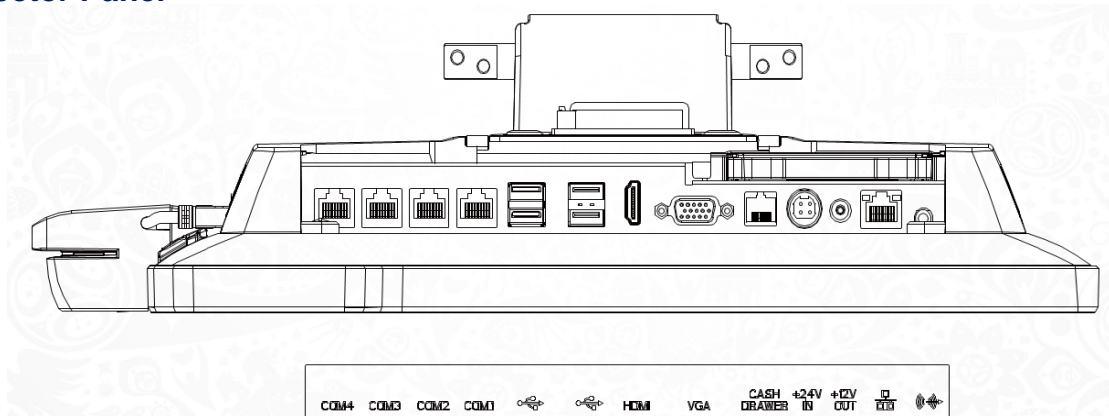

- Features and specifications are subject to change without notice
- Microsoft Windows and Microsoft logo are trademarks or registered trademarks of Microsoft Corporation in the United State and other countries
- Intel®, Celeron® are trademarks or registered trademarks of Intel Corporation. See the notes in the relevant products for details.
- The colors of products shown in this brochure may vary from actual product colors due to printing conditions.

## Contact Information

Regional Retail Solutions Division

+603-22996322

